


PLAN

- NOTES:
1. CURB CUTS MUST HAVE A MINIMUM OF 5' SEPARATION.
  2. CURB CUTS MUST BE A MINIMUM OF 5' FROM DRIVEWAY APRON.
  3. CURB CUTS MUST BE A MINIMUM OF 20' FROM ALL CORNERS & A MINIMUM OF 50' BACK OF CORNERS WITH STOP SIGNS.

1


**WATER HARVESTING CURB CUT DETAIL**

NTS

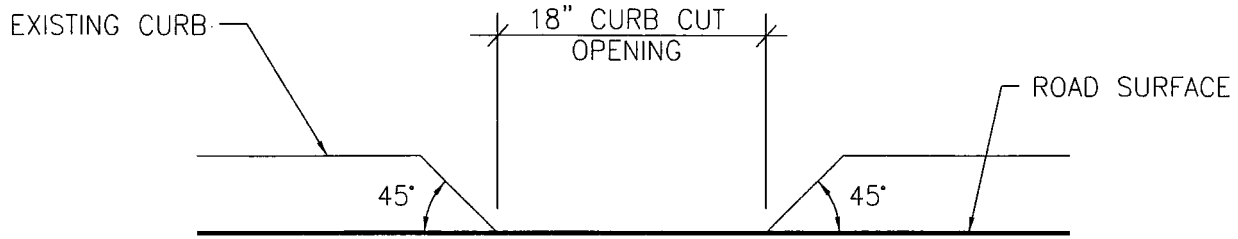

1. DO NOT CUT DEEPER THAN ROAD SURFACE ELEVATION.
2. ALL CURB OPENINGS SHALL BE MADE BY SAW CUT METHOD.

### SECTION A-A

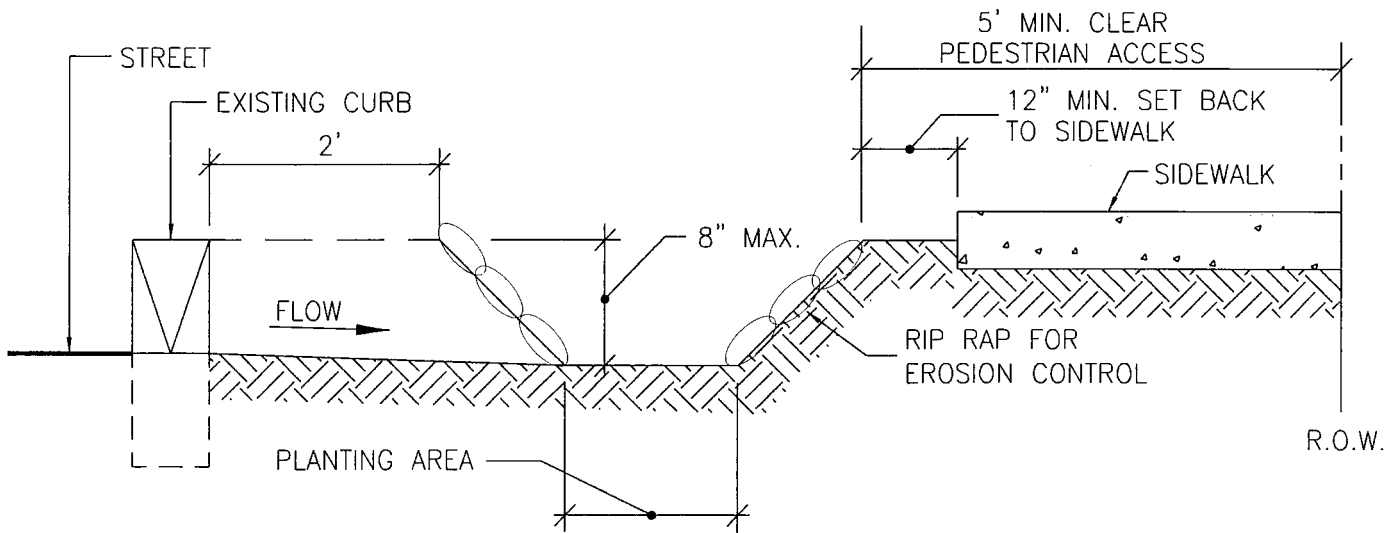

### SECTION B-B

2

## WATER HARVESTING CURB CUT DETAIL

NTS